


General Standards Corporation

High Performance Bus Interface Solutions

cPCI to PMC Adapter-PXI

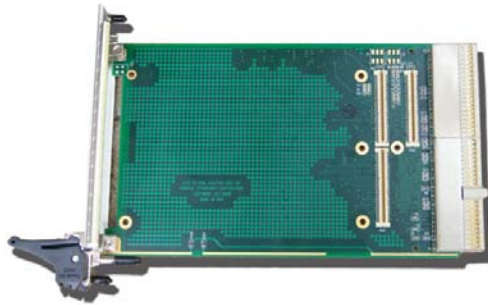

Features

- Supports both 32/64 bit PCI Bus
- Supports both 3.3v and 5v PCI Signaling
- Supports both 33Mhz and 66Mhz PCI Bus
- Optional PXI Configuration available
- Field-alterable configuration features
- Adapts a single-width PMC form factor to cPCI

PCI Compatibility:

Conforms to PCI Specification 2.3, with 33/66MHz, D32/64 and universal signaling 5/3.3 Volt.

Physical Parameters

PCI Mechanical Characteristics (Adapter)

Height: 15.0 mm (0.59 in) *board and adapter combined.

Depth: 160 mm (6.60 in)

Width: 100 mm (3.80 in)

Environmental Specifications

Ambient Temperature Range:	Operating: 0 to +65 Degrees Celsius inlet air Storage: -40 to +85 Degrees Celsius
Relative Humidity:	Operating: 0 to 80%, non-condensing Storage: 0 to 95%, non-condensing

Ordering Information

Specify the basic product model number followed by an option suffix "-1", as indicated below. For example, model number "cPCI to PMC Adapter-PXI-1" describes a board with PXI added to the board. Unless otherwise specified, the Adapter is preassembled not to include the "PXI" option (i.e. cPCI to PMC Adapter). Contact the factory for more details.

Optional Parameter	Value	Specify Option As:
PXI Trigger connectivity to PMC connectors.	without	-0, or leave blank
	with TRIG 0-3	-1
	with TRIG 4-7	-2

PXI Features:

This product allows a PMC module to connect to the PXI Trigger signals via the cPCI backplane. Connections can be made by use of the external connectors J1 and J2 (always wired) or through the unused pins within the PMC connectors (optional connectivity). The wiring is shown below.

External Connectors J1 & J2:

J1.1 – PXI TRIG 0	J2.1 – PXI TRIG 4
J1.2 – PXI TRIG 1	J2.2 – PXI TRIG 5
J1.3 – PXI TRIG 2	J2.3 – PXI TRIG 6
J1.4 – PXI TRIG 3	J2.4 – PXI TRIG 7
J1.5 – GND	J2.5 – GND
J1.6 – GND	J2.6 – GND

PMC Connectors PN1 & PN2: (optional)

PN1.41 – PXI TRIG 0 or 4
PN1.42 – PXI TRIG 1 or 5
PN2.10 – PXI TRIG 2 or 6
PN2.34 – PXI TRIG 3 or 7

General Standards Corporation assumes no responsibility for the use of any circuits in this product. No circuit patent licenses are implied. Information included herein supersedes previously published specifications on this product and is subject to change without notice.