

# Serial I/O Cables

## Description And Connection Diagrams

### **CABLEx-SIO4B-STD3-DB25x-RS530**

For the following products:

**PMC-SIO4BX**

**PCI-SIO4B**

**PC104P-SIO4B**

**PMC-SIO4BX-SYNC**

**PCI-SIO4B-SYNC**

**PC104P-SIO4B-SYNC**

Preliminary

December 5, 2008

Revision: A

**General Standards Corporation**  
**8302A Whitesburg Drive**  
**Huntsville, AL 35802**  
**Tel: (256) 880.8787 or (800) 653.9970**  
**Fax: (256) 880-8788**  
**Email: [sales@generalstandards.com](mailto:sales@generalstandards.com)**  
**URL: [www.generalstandards.com](http://www.generalstandards.com)**

## PREFACE

---

### **General Standards Corporation**

Copyright (C) 2005 **General Standards Corp.**

Additional copies of this manual or other literature may be obtained from:

**General Standards Corporation**  
8302A Whitesburg Dr.  
Huntsville, Alabama 35802  
Tele: (256) 880-8787  
FAX: (256) 880-8788  
Email: support@ **generalstandards.com**  
URL: [www.generalstandards.com](http://www.generalstandards.com)

This document provides information on the description and connection diagrams for serial IO cables.

### Disclaimers

The information in this document is subject to change without notice.

**General Standards Corp.** makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Although extensive editing and reviews are performed before release to ECO control, **General Standards Corp.** assumes no responsibility for any errors that may exist in this document. No commitment is made to update or keep current the information contained in this document.

**General Standards Corp.** does not assume any liability arising out of the application or use of any product or circuit described herein, nor is any license conveyed under any patent rights or any rights of others.

**General Standards Corp.** assumes no responsibility for any consequences resulting from omissions or errors in this document, or from the use of information contained herein.

**General Standards Corp.** reserves the right to make any changes, without notice, to this product to improve reliability, performance, function, or design.

### **All rights reserved**

This document may be copied or reproduced in any form or by any means, provided it is in support of products from GSC. For any other use, no part of this document may be copied or reproduced in any form or by any means without prior written consent of **General Standards Corp.**

# Introduction

This document includes descriptions and pin-out for serial IO cables for SIO4B/BX family of boards (PMC-SIO4BX, PCI-SIO4B). All of these boards have the same high-density connector so that all can be interchanged in a system without changing the serial IO cables.

**NOTE:** Since the SIO4B/BX/SYNC family of cards can accommodate many different protocols, the pin assignments for the DB25 connectors do not match any unique specification. General Standards Corporation can accommodate special pin assignments at the time you place the order. Please contact General Standards Corporation for more information.

All cables described in this diagram have a high-density connector on the ends that mate with any of these SIO4B/BX boards.

Cable part numbers for these SIO4B/BX boards are:

1) **CABLE<sub>x</sub>-SIO4B-STD3-DB25<sub>x</sub>-RS530**

- x => length in feet (multiple of 1.5 ft, in lengths up to 100 feet)
- STD2 => standard wiring diagram per diagram attached
- DB25 => Four DB25 connectors are attached to the user end of the cable.
  - DB25P indicates DB25P connectors (P = pins, male)
  - DB25S indicated DB25S connectors (S = socket, female)
- RS530 => Indicates a custom pin-out


2) **CABLE<sub>x</sub>-SIO4B-FLAT**

- x => length in feet (multiple of 1.5 ft, in lengths up to 100 feet)
- FLAT => designates a 68-pin connector on SIO4BX end only.

These cables use standard 68 conductor ‘twist-n-flat’ (also known as ‘vari-twist’) cable. It is made up of twisted pairs with a flat area every 1.5 feet. The conductor spacing in the flat area is standard 50 mil allowing connections to standard IDC connectors.

The pin-out on all of the boards assures that each differential signal is routed to a single twisted pair in the cable.

## SIO4B/BX card family cable overview:

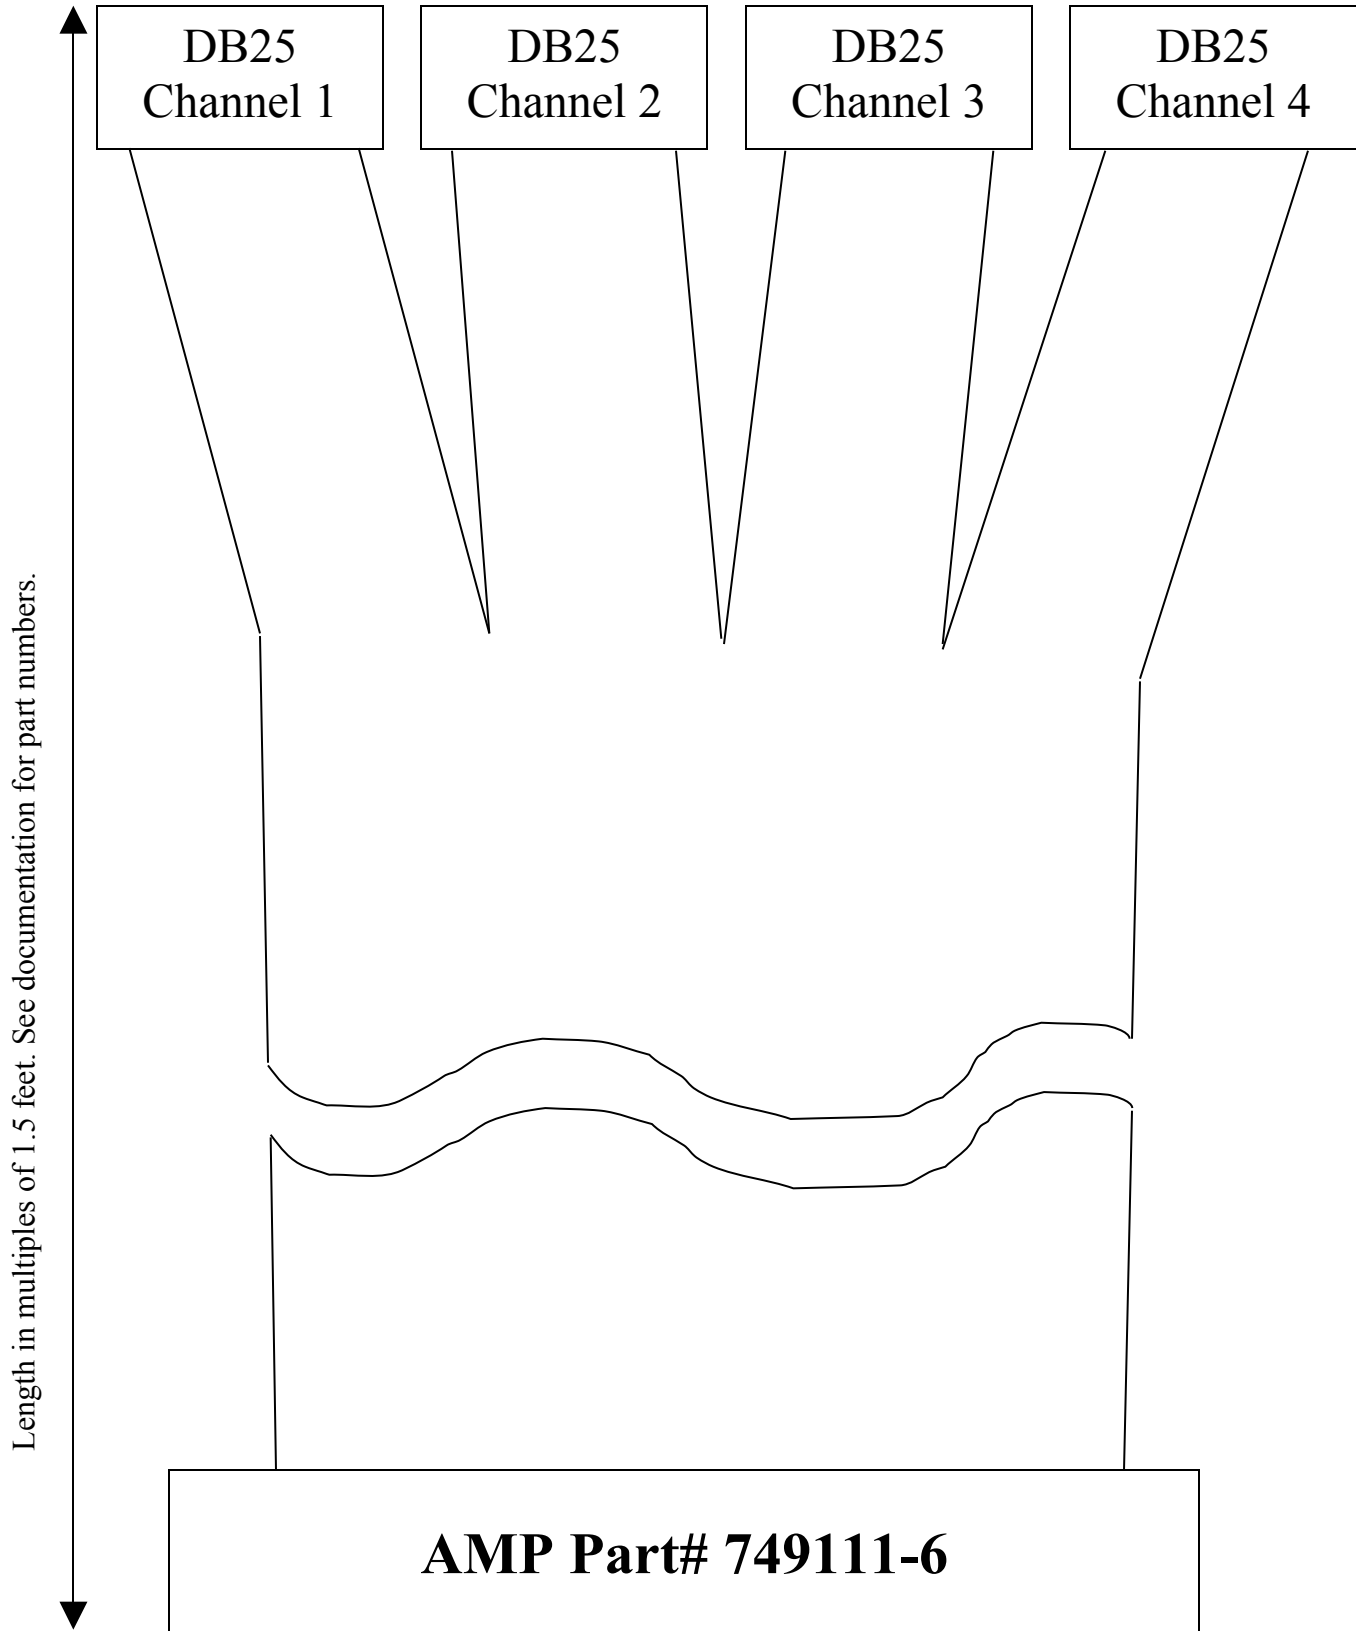

## Cable CONNECTIONS for the CABLEx-SIO4B-STD3-DB25x-RS530:

Cable connections for the SIO4BX:							
Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:	Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:
1	11	Ch1 TxC +	Ch1 RxC +	35	11	Ch3 TxC +	Ch3 RxC +
2	24	Ch1 TxC -	Ch1 RxC -	36	24	Ch3 TxC -	Ch3 RxC -
3	10	Ch1 DCD +		37	10	Ch3 DCD +	
4	8	Ch1 DCD -		38	8	Ch3 DCD -	
5	13	Ch1 CTS +	Ch1 RTS +	39	13	Ch3 CTS +	Ch3 RTS +
6	5	Ch1 CTS -	Ch1 RTS -	40	5	Ch3 CTS -	Ch3 RTS -
7	16	Ch1 RxD +	Ch1 TxD +	41	16	Ch3 RxD +	Ch3 TxD +
8	3	Ch1 RxD -	Ch1 TxD -	42	3	Ch3 RxD -	Ch3 TxD -
9	9	Ch1 RxC +	Ch1 TxC +	43	9	Ch3 RxC +	Ch3 TxC +
10	17	Ch1 RxC -	Ch1 TxC -	44	17	Ch3 RxC -	Ch3 TxC -
11	19	Ch1 RTS +	Ch1 CTS +	45	19	Ch3 RTS +	Ch3 CTS +
12	4	Ch1 RTS -	Ch1 CTS -	46	4	Ch3 RTS -	Ch3 CTS -
13	14	Ch1 TxD +	Ch1 RxD +	47	14	Ch3 TxD +	Ch3 RxD +
14	2	Ch1 TxD -	Ch1 RxD -	48	2	Ch3 TxD -	Ch3 RxD -
15	12	Ch1 AuxC +		49	12	Ch3 AuxC +	
16	15	Ch1 AuxC -		50	15	Ch3 AuxC -	
17	7	GND	GND	51	7	GND	GND
18	7	GND	GND	52	7	GND	GND
19	13	Ch2 CTS +	Ch2 RTS +	53	13	Ch4 CTS +	Ch4 RTS +
20	5	Ch2 CTS -	Ch2 RTS -	54	5	Ch4 CTS -	Ch4 RTS -
21	16	Ch2 RxD +	Ch2 TxD +	55	16	Ch4 RxD +	Ch4 TxD +
22	3	Ch2 RxD -	Ch2 TxD -	56	3	Ch4 RxD -	Ch4 TxD -
23	9	Ch2 RxC +	Ch2 TxC +	57	9	Ch4 RxC +	Ch4 TxC +
24	17	Ch2 RxC -	Ch2 TxC -	58	17	Ch4 RxC -	Ch4 TxC -
25	19	Ch2 RTS +	Ch2 CTS +	59	19	Ch4 RTS +	Ch4 CTS +
26	4	Ch2 RTS -	Ch2 CTS -	60	4	Ch4 RTS -	Ch4 CTS -
27	14	Ch2 TxD +	Ch2 RxD +	61	14	Ch4 TxD +	Ch4 RxD +
28	2	Ch2 TxD -	Ch2 RxD -	62	2	Ch4 TxD -	Ch4 RxD -
29	12	Ch2 AuxC +		63	12	Ch4 AuxC +	
30	15	Ch2 AuxC -		64	15	Ch4 AuxC -	
31	10	Ch2 DCD +		65	10	Ch4 DCD +	
32	8	Ch2 DCD -		66	8	Ch4 DCD -	
33	11	Ch2 TxC +	Ch2 RxC +	67	11	Ch4 TxC +	Ch4 RxC +
34	24	Ch2 TxC -	Ch2 RxC -	68	24	Ch4 TxC -	Ch4 RxC -

The above pin description relates to a custom version of the serial I/O cables with the part number **CABLEx-SIO4B-STD3-DB25x-RS530**.