

Serial I/O Cables

Description And Connection Diagrams

CABLEx-SIO4B-STD3-DB25x

For the following products:

PMC-SIO4BX

PCI-SIO4B

PC104P-SIO4B

PMC-SIO4BX-SYNC

PCI-SIO4B-SYNC

PC104P-SIO4B-SYNC

Preliminary

December 02, 2009

Revision: F

General Standards Corporation

8302A Whitesburg Drive

Huntsville, AL 35802

Tel: (256) 880.8787 or (800) 653.9970

Fax: (256) 880-8788

Email: sales@generalstandards.com

URL: www.generalstandards.com

PREFACE

General Standards Corporation
Copyright (C) 2005 **General Standards Corp.**

Additional copies of this manual or other literature may be obtained from:

General Standards Corporation
8302A Whitesburg Dr.
Huntsville, Alabama 35802
Tele: (256) 880-8787
FAX: (256) 880-8788
Email: support@ **generalstandards.com**
URL: www.generalstandards.com

This document provides information on the description and connection diagrams for serial IO cables.

Disclaimers

The information in this document is subject to change without notice.

General Standards Corp. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Although extensive editing and reviews are performed before release to ECO control, **General Standards Corp.** assumes no responsibility for any errors that may exist in this document. No commitment is made to update or keep current the information contained in this document.

General Standards Corp. does not assume any liability arising out of the application or use of any product or circuit described herein, nor is any license conveyed under any patent rights or any rights of others.

General Standards Corp. assumes no responsibility for any consequences resulting from omissions or errors in this document, or from the use of information contained herein.

General Standards Corp. reserves the right to make any changes, without notice, to this product to improve reliability, performance, function, or design.

All rights reserved

This document may be copied or reproduced in any form or by any means, provided it is in support of products from GSC. For any other use, no part of this document may be copied or reproduced in any form or by any means without prior written consent of **General Standards Corp.**

Introduction

This document includes descriptions and pin-out for serial IO cables for SIO4B/BX family of boards (PMC-SIO4BX, PCI-SIO4B). All of these boards have the same high-density connector so that all can be interchanged in a system without changing the serial IO cables.

NOTE: Since the SIO4B/BX/SYNC family of cards can accommodate many different protocols, the pin assignments for the DB25 connectors do not match any unique specification. General Standards Corporation can accommodate special pin assignments at the time you place the order. Please contact General Standards Corporation for more information.

All cables described in this diagram have a high-density connector on the ends that mate with any of these SIO4B/BX boards.

Cable part numbers for these SIO4B/BX boards are:

1) **CABLE_x-SIO4B-STD3-DB25_x**

x => length in feet (multiple of 1.5 ft, in lengths up to 100 feet)

STD3 => standard wiring diagram per diagram attached

DB25 => Four DB25 connectors are attached to the user end of the cable.

DB25P indicates DB25P connectors (P = pins, male)

DB25S indicated DB25S connectors (S = socket, female)

2) **CABLE_x-SIO4B-FLAT**


x => length in feet (multiple of 1.5 ft, in lengths up to 100 feet)

FLAT => designates a 68-pin connector on SIO4BX end only.

These cables use standard 68 conductor 'twist-n-flat' (also known as 'vari-twist') cable. It is made up of twisted pairs with a flat area every 1.5 feet. The conductor spacing in the flat area is standard 50 mil allowing connections to standard IDC connectors.

The pin-out on all of the boards assures that each differential signal is routed to a single twisted pair in the cable.

SIO4B/BX card family cable overview:

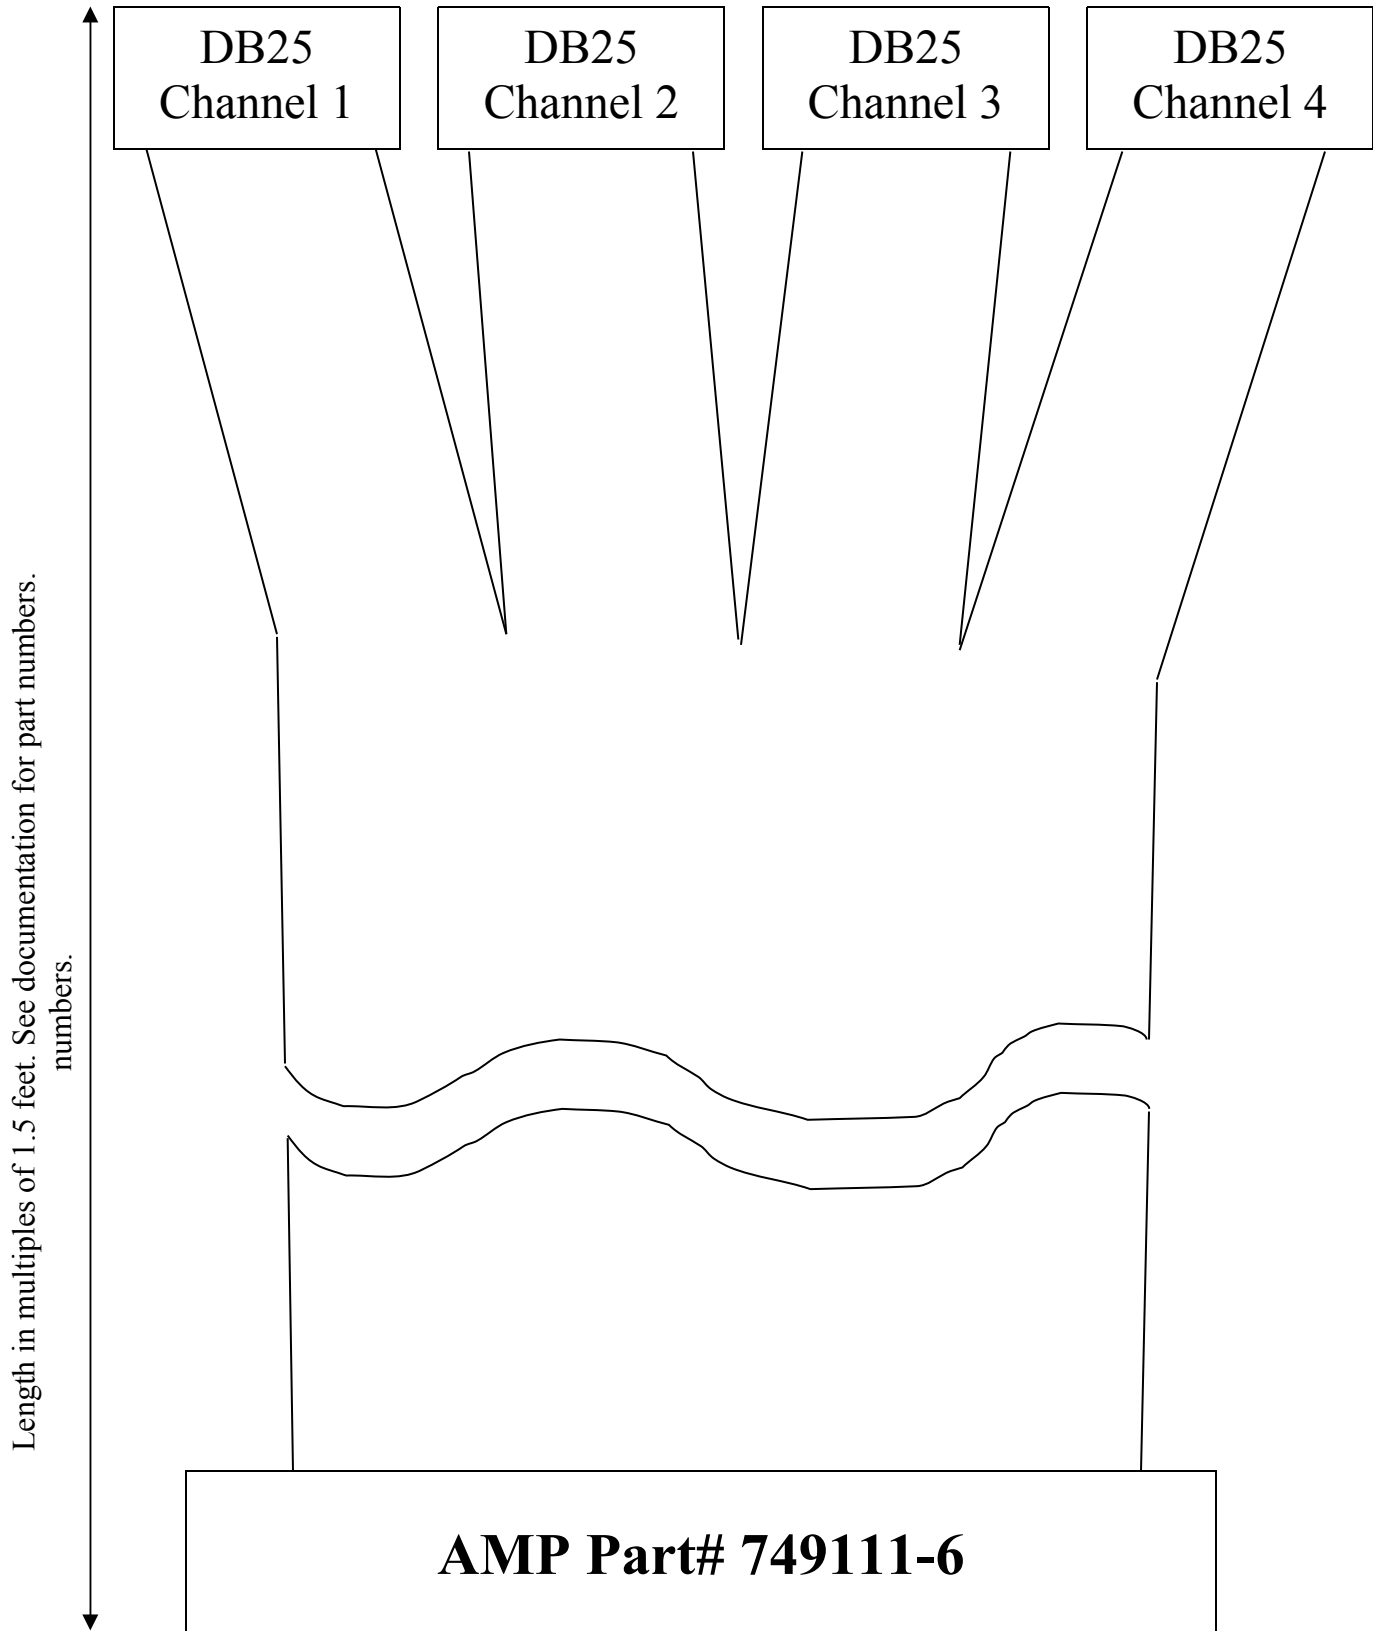

Cable CONNECTIONS for the CABLE_x-SIO4B-STD3-DB25_x:

Cable connections for the SIO4B:							
Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:	Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:
1	12	RESERVED		35	12	RESERVED	
2	25	RESERVED		36	25	RESERVED	
3	10	RESERVED		37	10	RESERVED	
4	23	RESERVED		38	23	RESERVED	
5	3	Ch1 CTS +	Ch1 RTS +	39	3	Ch3 CTS +	Ch3 RTS +
6	16	Ch1 CTS -	Ch1 RTS -	40	16	Ch3 CTS -	Ch3 RTS -
7	1	Ch1 Rx D +	Ch1 Tx D +	41	1	Ch3 Rx D +	Ch3 Tx D +
8	14	Ch1 Rx D -	Ch1 Tx D -	42	14	Ch3 Rx D -	Ch3 Tx D -
9	5	Ch1 Rx C +	Ch1 Tx C +	43	5	Ch3 Rx C +	Ch3 Tx C +
10	18	Ch1 Rx C -	Ch1 Tx C -	44	18	Ch3 Rx C -	Ch3 Tx C -
11	9	Ch1 RTS +	Ch1 CTS +	45	9	Ch3 RTS +	Ch3 CTS +
12	22	Ch1 RTS -	Ch1 CTS -	46	22	Ch3 RTS -	Ch3 CTS -
13	7	Ch1 Tx D +	Ch1 Rx D +	47	7	Ch3 Tx D +	Ch3 Rx D +
14	20	Ch1 Tx D -	Ch1 Rx D -	48	20	Ch3 Tx D -	Ch3 Rx D -
15	11	Ch1 Tx C +	Ch1 Rx C +	49	11	Ch3 Tx C +	Ch3 Rx C +
16	24	Ch1 Tx C -	Ch1 Rx C -	50	24	Ch3 Tx C -	Ch3 Rx C -
17	13	Ch 1 GND		51	13	Ch 3 GND	
18	13	Ch 2 GND		52	13	Ch 4 GND	
19	3	Ch2 CTS +	Ch2 RTS +	53	3	Ch4 CTS +	Ch4 RTS +
20	16	Ch2 CTS -	Ch2 RTS -	54	16	Ch4 CTS -	Ch4 RTS -
21	1	Ch2 Rx D +	Ch2 Tx D +	55	1	Ch4 Rx D +	Ch4 Tx D +
22	14	Ch2 Rx D -	Ch2 Tx D -	56	14	Ch4 Rx D -	Ch4 Tx D -
23	5	Ch2 Rx C +	Ch2 Tx C +	57	5	Ch4 Rx C +	Ch4 Tx C +
24	18	Ch2 Rx C -	Ch2 Tx C -	58	18	Ch4 Rx C -	Ch4 Tx C -
25	9	Ch2 RTS +	Ch2 CTS +	59	9	Ch4 RTS +	Ch4 CTS +
26	22	Ch2 RTS -	Ch2 CTS -	60	22	Ch4 RTS -	Ch4 CTS -
27	7	Ch2 Tx D +	Ch2 Rx D +	61	7	Ch4 Tx D +	Ch4 Rx D +
28	20	Ch2 Tx D -	Ch2 Rx D -	62	20	Ch4 Tx D -	Ch4 Rx D -
29	11	Ch2 Tx C +	Ch2 Rx C +	63	11	Ch4 Tx C +	Ch4 Rx C +
30	24	Ch2 Tx C -	Ch2 Rx C -	64	24	Ch4 Tx C -	Ch4 Rx C -
31	10	RESERVED		65	10	RESERVED	
32	23	RESERVED		66	23	RESERVED	
33	12	RESERVED		67	12	RESERVED	
34	25	RESERVED		68	25	RESERVED	

Cable CONNECTIONS for the CABLEx-SIO4B-STD3-DB25x:

Cable connections for the SIO4BX:							
Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:	Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:
1	12	Ch1 AuxC +		35	12	Ch3 AuxC +	
2	25	Ch1 AuxC -		36	25	Ch3 AuxC -	
3	10	Ch1 DCD +		37	10	Ch3 DCD +	
4	23	Ch1 DCD -		38	23	Ch3 DCD -	
5	3	Ch1 CTS +	Ch1 RTS +	39	3	Ch3 CTS +	Ch3 RTS +
6	16	Ch1 CTS -	Ch1 RTS -	40	16	Ch3 CTS -	Ch3 RTS -
7	1	Ch1 RxD +	Ch1 TxD +	41	1	Ch3 RxD +	Ch3 TxD +
8	14	Ch1 RxD -	Ch1 TxD -	42	14	Ch3 RxD -	Ch3 TxD -
9	5	Ch1 RxC +	Ch1 TxC +	43	5	Ch3 RxC +	Ch3 TxC +
10	18	Ch1 RxC -	Ch1 TxC -	44	18	Ch3 RxC -	Ch3 TxC -
11	9	Ch1 RTS +	Ch1 CTS +	45	9	Ch3 RTS +	Ch3 CTS +
12	22	Ch1 RTS -	Ch1 CTS -	46	22	Ch3 RTS -	Ch3 CTS -
13	7	Ch1 TxD +	Ch1 RxD +	47	7	Ch3 TxD +	Ch3 RxD +
14	20	Ch1 TxD -	Ch1 RxD -	48	20	Ch3 TxD -	Ch3 RxD -
15	11	Ch1 TxC +	Ch1 RxC +	49	11	Ch3 TxC +	Ch3 RxC +
16	24	Ch1 TxC -	Ch1 RxC -	50	24	Ch3 TxC -	Ch3 RxC -
17	13	Ch 1 GND		51	13	Ch 3 GND	
18	13	Ch 2 GND		52	13	Ch 4 GND	
19	3	Ch2 CTS +	Ch2 RTS +	53	3	Ch4 CTS +	Ch4 RTS +
20	16	Ch2 CTS -	Ch2 RTS -	54	16	Ch4 CTS -	Ch4 RTS -
21	1	Ch2 RxD +	Ch2 TxD +	55	1	Ch4 RxD +	Ch4 TxD +
22	14	Ch2 RxD -	Ch2 TxD -	56	14	Ch4 RxD -	Ch4 TxD -
23	5	Ch2 RxC +	Ch2 TxC +	57	5	Ch4 RxC +	Ch4 TxC +
24	18	Ch2 RxC -	Ch2 TxC -	58	18	Ch4 RxC -	Ch4 TxC -
25	9	Ch2 RTS +	Ch2 CTS +	59	9	Ch4 RTS +	Ch4 CTS +
26	22	Ch2 RTS -	Ch2 CTS -	60	22	Ch4 RTS -	Ch4 CTS -
27	7	Ch2 TxD +	Ch2 RxD +	61	7	Ch4 TxD +	Ch4 RxD +
28	20	Ch2 TxD -	Ch2 RxD -	62	20	Ch4 TxD -	Ch4 RxD -
29	11	Ch2 TxC +	Ch2 RxC +	63	11	Ch4 TxC +	Ch4 RxC +
30	24	Ch2 TxC -	Ch2 RxC -	64	24	Ch4 TxC -	Ch4 RxC -
31	10	Ch2 DCD +		65	10	Ch4 DCD +	
32	23	Ch2 DCD -		66	23	Ch4 DCD -	
33	12	Ch2 AuxC +		67	12	Ch4 AuxC +	
34	25	Ch2 AuxC -		68	25	Ch4 AuxC -	

Cable CONNECTIONS for the CABLEx-SIO4B-STD3-DB25x:

Cable connections for the SIO4B-SYNC:							
Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:	Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:
1	12	RESERVED		35	12	RESERVED	
2	25	RESERVED		36	25	RESERVED	
3	10	RESERVED		37	10	RESERVED	
4	23	RESERVED		38	23	RESERVED	
5	3	Ch1 RxE +	Ch1 TxE +	39	3	Ch3 RxE +	Ch3 TxE +
6	16	Ch1 RxE -	Ch1 TxE -	40	16	Ch3 RxE -	Ch3 TxE -
7	1	Ch1 RxD +	Ch1 TxD +	41	1	Ch3 RxD +	Ch3 TxD +
8	14	Ch1 RxD -	Ch1 TxD -	42	14	Ch3 RxD -	Ch3 TxD -
9	5	Ch1 RxC +	Ch1 TxC +	43	5	Ch3 RxC +	Ch3 TxC +
10	18	Ch1 RxC -	Ch1 TxC -	44	18	Ch3 RxC -	Ch3 TxC -
11	9	Ch1 TxE +	Ch1 RxE +	45	9	Ch3 TxE +	Ch3 RxE +
12	22	Ch1 TxE -	Ch1 RxE -	46	22	Ch3 TxE -	Ch3 RxE -
13	7	Ch1 TxD +	Ch1 RxD +	47	7	Ch3 TxD +	Ch3 RxD +
14	20	Ch1 TxD -	Ch1 RxD -	48	20	Ch3 TxD -	Ch3 RxD -
15	11	Ch1 TxC +	Ch1 RxC +	49	11	Ch3 TxC +	Ch3 RxC +
16	24	Ch1 TxC -	Ch1 RxC -	50	24	Ch3 TxC -	Ch3 RxC -
17	13	Ch 1 GND		51	13	Ch 3 GND	
18	13	Ch 2 GND		52	13	Ch 4 GND	
19	3	Ch2 RxE +	Ch2 TxE +	53	3	Ch4 RxE +	Ch4 TxE +
20	16	Ch2 RxE -	Ch2 TxE -	54	16	Ch4 RxE -	Ch4 TxE -
21	1	Ch2 RxD +	Ch2 TxD +	55	1	Ch4 RxD +	Ch4 TxD +
22	14	Ch2 RxD -	Ch2 TxD -	56	14	Ch4 RxD -	Ch4 TxD -
23	5	Ch2 RxC +	Ch2 TxC +	57	5	Ch4 RxC +	Ch4 TxC +
24	18	Ch2 RxC -	Ch2 TxC -	58	18	Ch4 RxC -	Ch4 TxC -
25	9	Ch2 TxE +	Ch2 RxE +	59	9	Ch4 TxE +	Ch4 RxE +
26	22	Ch2 TxE -	Ch2 RxE -	60	22	Ch4 TxE -	Ch4 RxE -
27	7	Ch2 TxD +	Ch2 RxD +	61	7	Ch4 TxD +	Ch4 RxD +
28	20	Ch2 TxD -	Ch2 RxD -	62	20	Ch4 TxD -	Ch4 RxD -
29	11	Ch2 TxC +	Ch2 RxC +	63	11	Ch4 TxC +	Ch4 RxC +
30	24	Ch2 TxC -	Ch2 RxC -	64	24	Ch4 TxC -	Ch4 RxC -
31	10	RESERVED		65	10	RESERVED	
32	23	RESERVED		66	23	RESERVED	
33	12	RESERVED		67	12	RESERVED	
34	25	RESERVED		68	25	RESERVED	

Cable CONNECTIONS for the CABLEx-SIO4B-STD3-DB25x:

Cable connections for the SIO4BX-SYNC:							
Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:	Board Pin #	DB25 Pin #	DTE Mode Signal:	DCE Mode Signal:
1	12	Ch1 RxAuxC/TxAuxC +		35	12	Ch3 RxAuxC/TxAuxC +	
2	25	Ch1 RxAuxC/TxAuxC -		36	25	Ch3 RxAuxC/TxAuxC -	
3	10	Ch1 RxSp/TxSp +		37	10	Ch3 RxSp/TxSp +	
4	23	Ch1 RxSp/TxSp -		38	23	Ch3 RxSp/TxSp -	
5	3	Ch1 RxE +	Ch1 TxE +	39	3	Ch3 RxE +	Ch3 TxE +
6	16	Ch1 RxE -	Ch1 TxE -	40	16	Ch3 RxE -	Ch3 TxE -
7	1	Ch1 RxD +	Ch1 TxD +	41	1	Ch3 RxD +	Ch3 TxD +
8	14	Ch1 RxD -	Ch1 TxD -	42	14	Ch3 RxD -	Ch3 TxD -
9	5	Ch1 RxC +	Ch1 TxC +	43	5	Ch3 RxC +	Ch3 TxC +
10	18	Ch1 RxC -	Ch1 TxC -	44	18	Ch3 RxC -	Ch3 TxC -
11	9	Ch1 TxE +	Ch1 RxE +	45	9	Ch3 TxE +	Ch3 RxE +
12	22	Ch1 TxE -	Ch1 RxE -	46	22	Ch3 TxE -	Ch3 RxE -
13	7	Ch1 TxD +	Ch1 RxD +	47	7	Ch3 TxD +	Ch3 RxD +
14	20	Ch1 TxD -	Ch1 RxD -	48	20	Ch3 TxD -	Ch3 RxD -
15	11	Ch1 TxC +	Ch1 RxC +	49	11	Ch3 TxC +	Ch3 RxC +
16	24	Ch1 TxC -	Ch1 RxC -	50	24	Ch3 TxC -	Ch3 RxC -
17	13	Ch 1 GND		51	13	Ch 3 GND	
18	13	Ch 2 GND		52	13	Ch 4 GND	
19	3	Ch2 RxE +	Ch2 TxE +	53	3	Ch4 RxE +	Ch4 TxE +
20	16	Ch2 RxE -	Ch2 TxE -	54	16	Ch4 RxE -	Ch4 TxE -
21	1	Ch2 RxD +	Ch2 TxD +	55	1	Ch4 RxD +	Ch4 TxD +
22	14	Ch2 RxD -	Ch2 TxD -	56	14	Ch4 RxD -	Ch4 TxD -
23	5	Ch2 RxC +	Ch2 TxC +	57	5	Ch4 RxC +	Ch4 TxC +
24	18	Ch2 RxC -	Ch2 TxC -	58	18	Ch4 RxC -	Ch4 TxC -
25	9	Ch2 TxE +	Ch2 RxE +	59	9	Ch4 TxE +	Ch4 RxE +
26	22	Ch2 TxE -	Ch2 RxE -	60	22	Ch4 TxE -	Ch4 RxE -
27	7	Ch2 TxD +	Ch2 RxD +	61	7	Ch4 TxD +	Ch4 RxD +
28	20	Ch2 TxD -	Ch2 RxD -	62	20	Ch4 TxD -	Ch4 RxD -
29	11	Ch2 TxC +	Ch2 RxC +	63	11	Ch4 TxC +	Ch4 RxC +
30	24	Ch2 TxC -	Ch2 RxC -	64	24	Ch4 TxC -	Ch4 RxC -
31	10	Ch2 RxSp/TxSp +		65	10	Ch4 RxSp/TxSp +	
32	23	Ch2 RxSp/TxSp -		66	23	Ch4 RxSp/TxSp -	
33	12	Ch2 RxAuxC/TxAuxC +		67	12	Ch4 RxAuxC/TxAuxC +	
34	25	Ch2 RxAuxC/TxAuxC -		68	25	Ch4 RxAuxC/TxAuxC -	

Please Note: if you have purchased cable part number CABLEx-SIO4AR-STD2-DB25x in the past, please contact the factory for availability of this cable.